



## Yuasa Technical Data Sheet

### Yuasa HJ-A24L - Auxilliary, Backup & Specialist Batteries

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 40Ah |
| Cold Cranking Amps (EN1) | 310A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 238mm |
| Width  | 129mm |
| Height | 187mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 10.7kg |
| Dry Weight            | -      |
| Acid Volume           | -      |



#### Container Features

|                           |                         |
|---------------------------|-------------------------|
| Case Type                 | A24 JIS AGM (Mazda MX5) |
| Hold Down                 | N                       |
| State of Charge Indicator | -                       |
| Handles                   | -                       |
| End Venting               | -                       |
| Semi-Traction Features    | ✓                       |
| Lid Type                  | VRLA                    |


#### Technology

|                         |                  |
|-------------------------|------------------|
| Flame Arrestor          | ✓                |
| Technology              | Ca/Ca VRLA       |
| Separator               | AGM              |
| VDA Roll Over Test      | -                |
| Vibration               | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 2A               |

#### Terminal Type

##### T1


Standard DIN Post

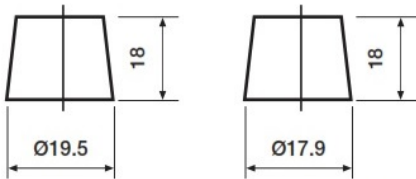

Positive Terminal

Negative Terminal

#### Cell Assembly Layout

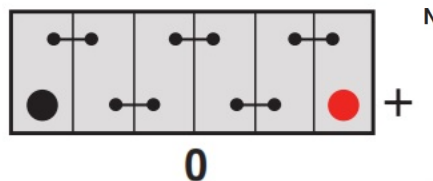

#### Battery Hold-down



Data Sheet generated on 25/08/2016 - E&OE