



Yuasa Technical Data Sheet

Yuasa HJ-S34B20L-A - Auxilliary, Backup & Specialist Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 35Ah |
| Cold Cranking Amps (EN1) | 272A |

Dimensions

| | |
|--------|-------|
| Length | 197mm |
| Width | 129mm |
| Height | 227mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 10.5kg |
| Dry Weight | - |
| Acid Volume | - |



Container Features


| | |
|---------------------------|-------------|
| Case Type | B20 JIS AGM |
| Hold Down | N |
| State of Charge Indicator | - |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | ✓ |
| Lid Type | VRLA |

Technology


| | |
|---------------------------|------------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca VRLA AGM |
| VDA Roll Over Test | - |
| Vibration | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 2A |

Terminal Type

T3
Small Japanese
JIS Terminal



Cell Assembly Layout

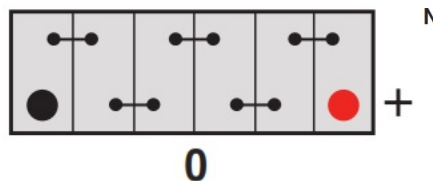

Battery Hold-down



Data Sheet generated on 25/08/2016 - E&OE