



Yuasa Technical Data Sheet

Yuasa YBX5056 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	340A

Dimensions

Length	187mm
Width	137mm
Height	225mm

Weights & Measures

Mean Weight with Acid	9.5kg
Dry Weight	-
Acid Volume	-

Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid



For Illustration Purposes Only


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3




Cell Assembly Layout

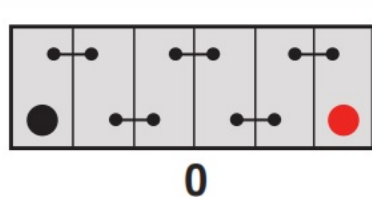

Battery Hold-down

B1

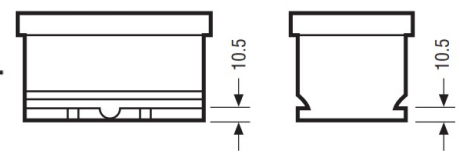

Data Sheet generated on 02/08/2017 - E&OE